

CUTTING & TAPPING FLUID is a special blend of synthetic oils and thickening agents, this product remains on the cutting bid even under extreme pressures. Keeps operating temperatures cool. Protects from rust and corrosion. Not recommended for use on copper or aluminum.

DIRECTIONS


Shake well before using. Hold nozzle 6 to 8 inches from surface requiring lubrication. Generously spray onto cutting surface or tool. Reapply as necessary to maintain lubrication level.

INGREDIENTS

Chemical Name:	C.A.S. #:
Sulfurized Napthenic Distillate..	(N/A)
Hydrotreated Heavy Napthenic Distillate.....	(N/A)
Kerosene.....	8008-20-6
Aliphatic Petroleum Distillate....	64742-89-8
Propane.....	74-98-6
Butane.....	106-97-8



7 11808 19817 1

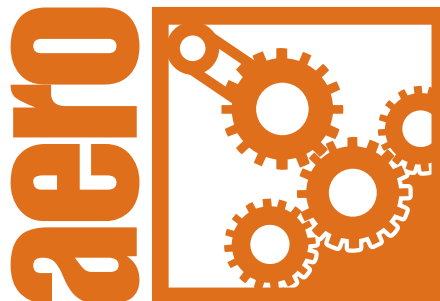

Cutting & Tapping Fluid

Clinging Coolant and Lubricant for Machining Operations

WARNING / PELIGRO
FLAMMABLE / INFLAMABLE
VAPOR HARMFUL / VAPORES DAÑINOS
HARMFUL OR FATAL IF SWALLOWED /
DAÑINO Y FATAL SI ES INGERIDO/TRAGADO
KEEP OUT OF REACH OF CHILDREN / MANTENGA ESTE
PRODUCTO FUERA DEL ALCANCE DE LOS NIÑOS
CONTENTS UNDER PRESSURE / CONTENIDO BAJO PRESIÓN
See additional cautions on side panels / Lea el panel al reverso para avisos adicionales del producto

NET WT.: 16 OZ. (454g)



Si usted no entiende la etiqueta, busque a alguien para que se la explique a usted en detalle. (If you do not understand this label, find someone to explain it to you in detail).

WARNING: Use only with adequate ventilation. Keep out of reach of children. Avoid excessive inhalation of fumes and repeated or prolonged contact with skin. Contents under pressure. Do not expose to heat or store at temperatures exceeding 120°F. Do not puncture or incinerate container. Wrap empty container and put in trash collection.

FIRST AID: If swallowed: Do not induce vomiting. Get medical attention immediately. **If inhaled:** Move to fresh air. If breathing has stopped, administer artificial respiration. Get medical attention. **If on skin:** Thoroughly wash with soap and water. Get medical attention if irritation persists. **If in eyes:** Flush with liberal amounts of water, lifting eyelids occasionally. Consult physician.

This product is designed exclusively for industrial and institutional use by trained personnel. This product is sold as is and the manufacturer makes no warranty, express or implied, of merchantability, fitness for a particular purpose or otherwise.

HMIS RATINGS / HMIS GRADO:

Flammability / Flammabilidad	4	0	Reactivity / Reactividad
Health/Salud	2	G	

Personal Protection / Protección Personal

RA678/210

distributed by:

aero
CHEMICAL COMPANY
a division of:
ABC
COMPOUNDING
Atlanta, GA / Dallas, TX